

Hisense

10,000
BTU

PORTABLE AIR CONDITIONER
With Inverter Technology & ConnectLife App

Model AP1022TW1GD
550 Sq. Ft.



- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- Up to 40% more energy efficient than standard portable room air conditioners
- Drain-free design -- no need to manually remove water
- Inverter technology ensures ultra-quiet operation
- Snap-assembly window kit is a snap to install
- Remote control for easy, convenient operation
- ConnectLife app allows easy control from anywhere
- Washable, removable filter for quick, easy cleaning
- 2-year warranty provides peace of mind



Ultra-Quiet Operation



3 Modes – cool, dehumidify and fan



Excellent Energy Efficiency



Drain-Free Operation



Google and Android are trademarks of Google LLC.



Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

The Hisense AP1022TW1GD Portable Air Conditioner is best suited for larger rooms (550 sq. ft. or less), delivering 10,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The convenient drain-free design means you never need to worry about removing condensed moisture, and the inverter technology is super-efficient and ultra-quiet. The ConnectLife smart app and included remote control put easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

Hisense

**550
SQ. FT**

**PORTABLE AIR CONDITIONER
SACC 10,000BTU**

Model AP1022TW1GD


| | |
|--|------------------------------------|
| Model # | AP1022TW1GD |
| Performance | |
| Maximum Cooling space | Up to 550 sq ft |
| Cooling Capacity -SACC (BTU) | 10000 |
| CEER | 7.8 |
| Dehumidification Pint / 24 hr (At 80°F / 50% Rh) | 79.2(At 80°F / 50% Rh) |
| Refrigerant | R32 |
| Airflow (CFM) | 165~224 |
| Noise Level in dB | 42~51 |
| Electrical | |
| Voltage/ Freq/ Amps | 115/ 60, 11/ 12 |
| Plug Type / NEMA# | LCDI (5-15P) |
| Power Cord Length (feet) | 4.9ft. (1.5m) |
| Control Features | |
| Unit Control Type | Electronic |
| Fan Control | Button |
| Thermostat Control | Electronic |
| Display Type | LED |
| Sleep Mode | YES (On the controller) |
| Dehumidifier Mode | YES |
| Cooling Speeds | 3 |
| Temp Display Units | °C / °F |
| Timer | YES |
| Auto Restart | YES |
| General Features | |
| Removable Filter | YES |
| Washable PP Filter | YES, Easy Access |
| Oscillating Air Vent Louvers | YES (On remote) |
| Vent System | Double Duct (2 - 5.9" Dia, X 59"L) |
| Accessories | |
| Remote Control | YES |
| AAA Batteries | YES |
| Air Hose | YES (2 - 5.9" Dia, X 59"L) |
| Window Kit | YES |
| Approvals | |
| Safety | ETL |
| Energy Star | NO |

| | |
|---------------------------------|-------------------|
| Product Dimensions | |
| Unit Dimension W x H x D (mm) | 442×718×373 |
| Net Weight (kg)- kits included | 31.7 |
| Unit Dimension W x H x D (inch) | 17.40×28.27×14.69 |
| Net Weight (lb)- kits included | 69.9 |
| Product | |
| Parts & Labor | 2 years |
| UPC | 819130029795 |

Note:

*: Rated Amps(A) / accorded UL 60335 Safety

Benefit of Inverter Technology

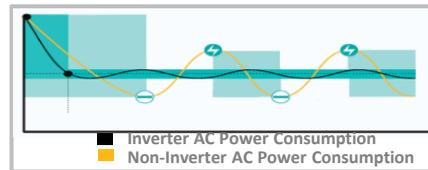

Up to 40% more Efficiency, compared to Inverter single hose Portable AC




Achieve 42 dB(A) when the unit runs in "Quiet" mode

Control Panel



Window Size

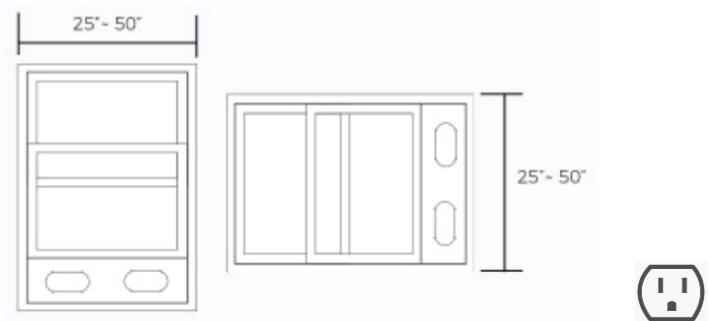

The window installation kit allows you to install the air conditioner in most vertical sliding windows 25" to 50" wide, or horizontal-sliding windows from 18" to 50" high.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2021 HisenseUSA. All rights reserved

HisenseUSA Corporation
 7310 McGinnis Ferry Road, Suwanee, GA, 30024
 1-877-465-3566
www.hisense-usa.com